

ALBA DRAG CHAIN CONVEYOR

Model No. DC-R80-3S-X-X-XX-XX

DRAG CHAIN _____
 RC-80 CARRYING CHAINS _____
 3-STRAND _____
 15", 15-3/4", 17-1/4", 18", 19-1/2", 22-1/4"
 CHAIN CENTERS _____
 4, 5, 6, 7, 8, 9, 10, 11, 12 _____
 LENGTH - FEET _____
 17" - 36" _____
 ELEVATION _____
 30, 45 OR 60 _____
 CONVEYOR SPEED (FPM)

Standard Specifications

Chain Strands: Three strands of RC-80 single roller chain

Chain Centers: Standard centers 15", 15-3/4", 17-1/4", 18", 19-1/2" and 22-1/4"

Frame: # 7 gauge formed channel rails with welded structural steel supports and cross ties

Chain Guides: Machined UHMW wear strip


Drive: Center drive with C-frame motor and shaft mounted gear reducer

Speed: 30, 45 or 60 FPM fixed

Elevation: 17" - 36" top of chain

Paint: Alba blue

PLEASE CONSULT THE FACTORY WITH YOUR APPLICATION FOR PROPER DRIVE SIZING.

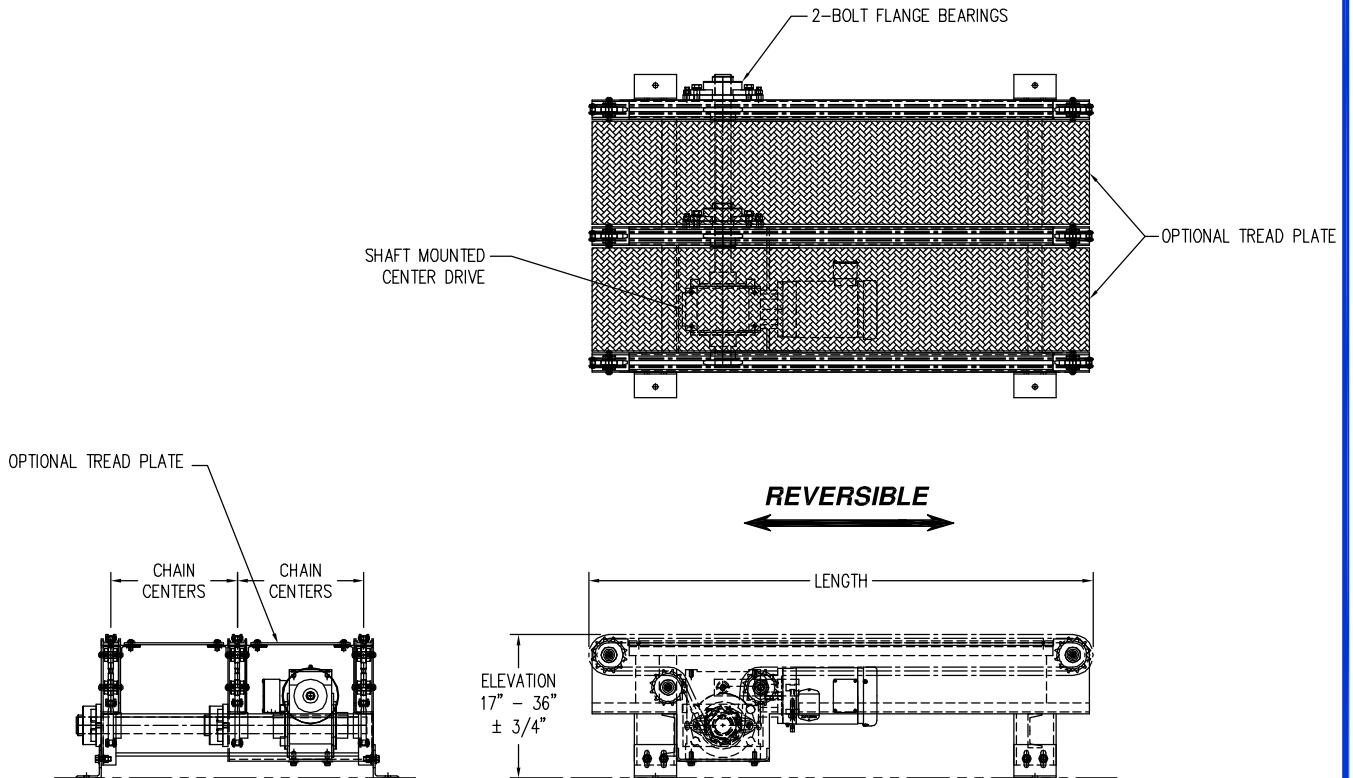

MOVE IT
 on Conveyors by ...

Alba

MANUFACTURING, INC.