

ALBA STANDARD INTERLACED DRAG CHAIN CONVEYOR

Model No. IDC-D50-3S-INTR-X-XX-XX

INTERLACED DRAG CHAIN

RC50-2 CARRYING CHAINS

3-STRAND

INTERMEDIATE (CENTER) SECTION

5, 10

LENGTH - FEET

12" - 36"

PASSLINE

30, 45 OR 60

CONVEYOR SPEED (FPM)

STANDARD SPECIFICATIONS

DRAG CHAIN FRAME: #7GA FORMED FRAME RAILS, STRUCTURAL STEEL SUPPORTS & CROSS MEMBERS, ALL WELDED CONSTRUCTION.


CARRYING CHAINS: RC50-2 SINGLE STRAND RIVETED ROLLER CHAIN.

CHAIN GUIDES: MACHINED UHMW WEARSTRIP.



DRIVE: CENTER CHAIN DRIVE WITH BALDOR C-FRAME MOTOR, 230/460/3/60, AND RIGHT ANGLE GEAR REDUCER.

OPTIONS: TREADPLATES BETWEEN CHAINS
VFD RATED MOTORS
GUIDE RAILS
PHOTO EYES

PLEASE CONSULT THE FACTORY WITH YOUR APPLICATION FOR PROPER DRIVE SIZING.

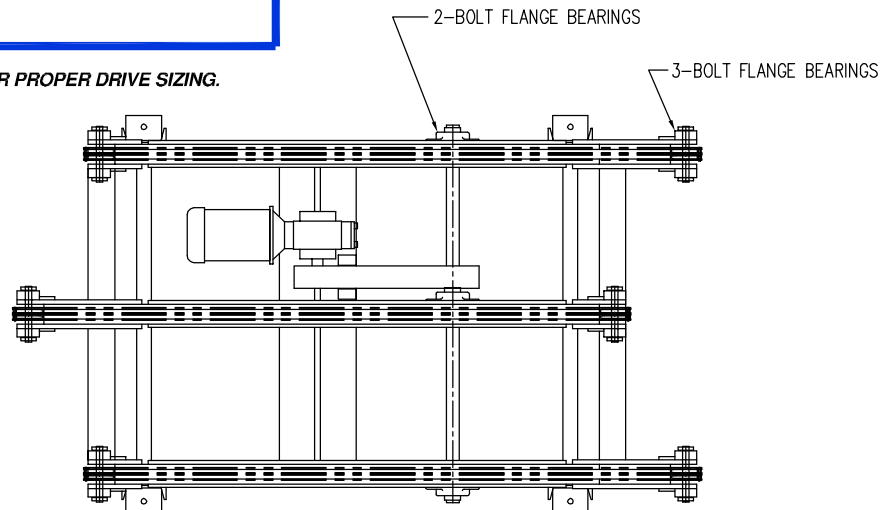

REVERSIBLE

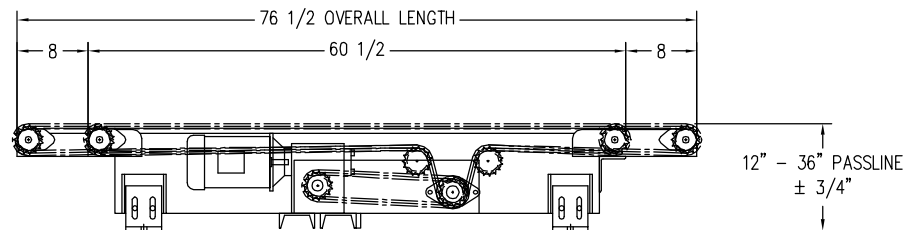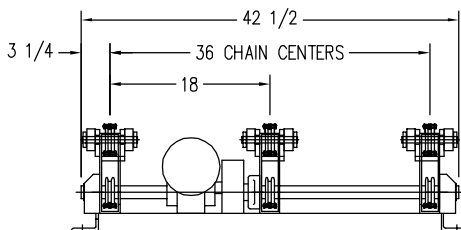

5' LONG MODEL SHOWN