




ELECTRIC/PNEUMATIC TURNTABLE

Standard Features:

- ***Welded, Structural Steel Frame Construction***
- ***2.5" Diameter x #11 Ga. Rollers with 11/16" Hex Axles***
- ***6,000 Lbs. Maximum Capacity with Centered Load***
- ***High Side CDLR Drive Mounting***
- ***30, 45 and 60 FPM Fixed Conveyor Speed***
- ***18" Top of Roller Up To 36" Top of Roller***
- ***90°, 180° or Continuous Rotation Units***
- ***Scalloped Type Roller Chain Guards #12 Ga. and #16 Ga. Drive Chain Guard***
- ***Heavy Duty Channel Supports +/- 3/4" Adjustment***
- ***Painted Alba Blue with Safety Yellow Guards***
- ***Units Typically Shipped Fully Assembled to Minimize Installation Time.***
- ***Conveyors Fully Tested Prior to Shipment***

Electric/Pneumatic Turntable

Centers	Chain	Effective Width	Table Dia.
2.75" DBS	RC-40 Chain	44"	72"
		48"	75"
		52"	78"
		54"	78"
		60"	86"
3.25"	RC-40 Chain	44"	72"
		48"	78"
		52"	84"
		54"	84"
		60"	86"
3.75"	RC-40 Chain	44"	72"
		48"	78"
		52"	84"
		54"	84"
		60"	86"
4"	RC-40 Chain	44"	72"
		48"	78"
		52"	78"
		54"	86"
		60"	86"
6"	RC-40 Chain	44"	72"
		48"	78"
		52"	84"
		54"	84"
		60"	86"
3.75"	RC-60 Chain	44"	78"
		48"	84"
		52"	84"
		54"	86"
		60"	92"
4.50"	RC-60 Chain	44"	72"
		48"	78"
		52"	82"
		54"	86"
		60"	86"
6"	RC-60 Chain	44"	72"
		48"	78"
		52"	84"
		54"	84"
		60"	86"

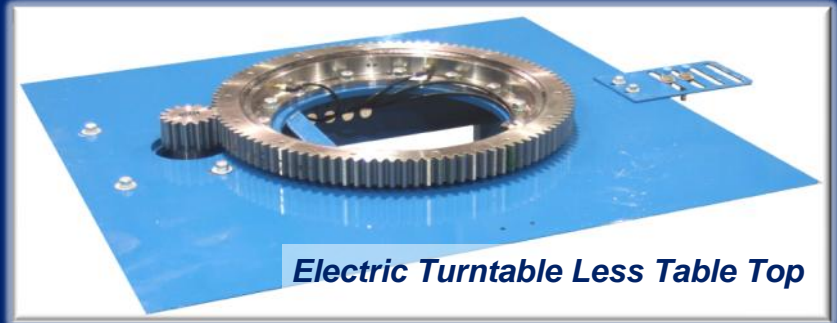

Pneumatic Base Features:

- 1/2" Thick Top Plate
- Heavy Duty Flange Bearing at Center Pivot
- (4) Heavy Duty Steel Casters for Support
- (2) Urethane Bumpers Included for 90° Stops
- 24VDC Double Solenoid Included
- 90° Rotation in 8 Seconds

Electric Base Features:

- 3/4" Thick Top Plate
- Large Diameter Ring Bearing with External Pinion Gear
- 230/460/3/60 Inverter Duty Brake Motor for Rotation
- Flange Mounted Gear Reducer
- 90° Rotation in 5 Seconds

Options:

- Proximity Switches to Sense Stopping Positions
- Slip Ring for Wiring Conveyor Top and Continuous Rotation
- 110VAC Control Voltage
- Transition Roller Stands



Alba Manufacturing, Inc.

8950 Seward Road, Fairfield, Ohio 45011

Phone: (866) 252-2634 Fax: (513) 874-9476

Web: WWW.ALBAMFG.COM