

CDLR CONVEYOR ROLLERS



Roller Diameters 1.9", 2-1/2", 2-9/16", 3-1/2", 4-1/4", 5"

When Ordering Please Specify the Following:

Part Number



Sprocket Size & Number of Teeth

Between Frame Dimensions

Bearing Type

Options:

- Zinc Plated Rollers & Axles
- Polyurethane Roller Covering
- Custom Configurations
- UHMW Slip Sleeves
- Galvanized Tubing

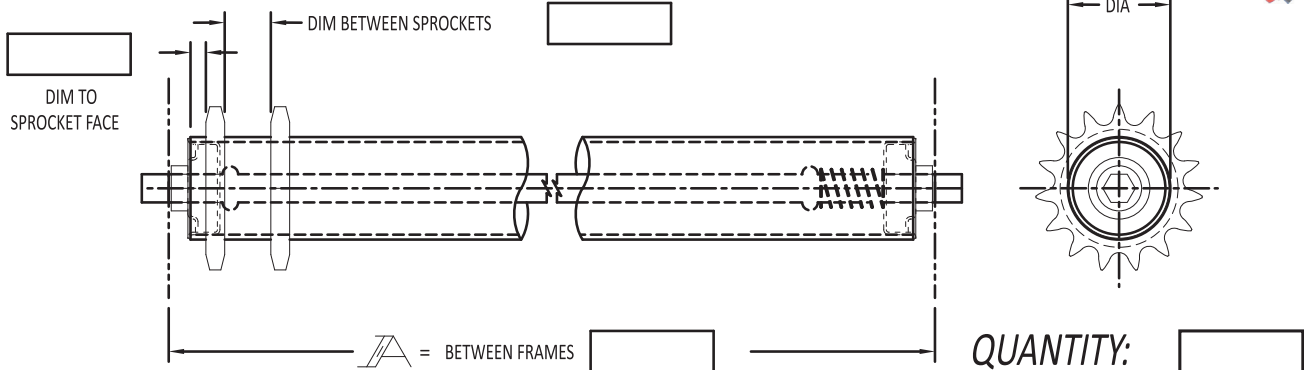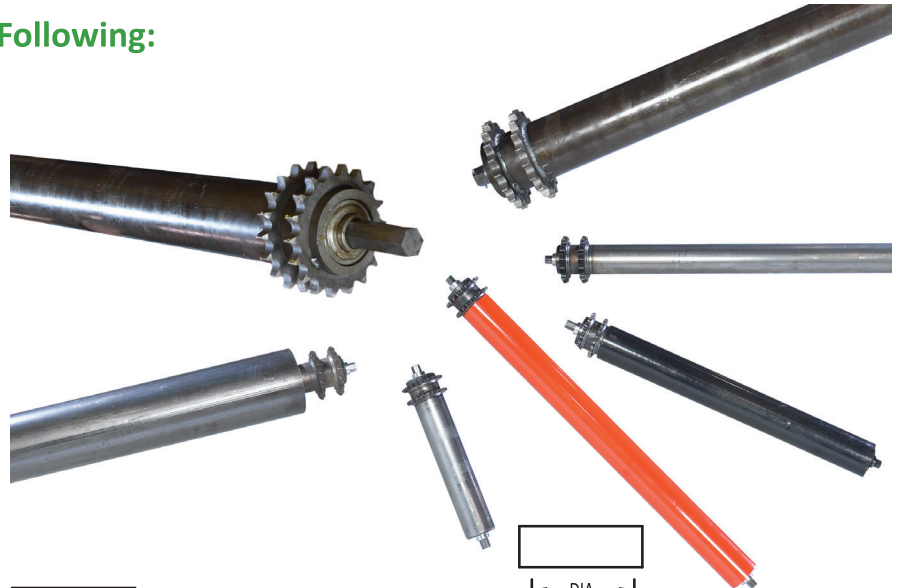

Example: 2511-60A16-24-MFC-2280-11H

Part Number: 2511
Sprocket Size: 60A
Number of Teeth: 16
Between Frame: 24
Bearing type: MFC-2280-11H



866.252.2634
www.albamfg.com
rocksolidconveyor@albamfg.com



Part Number	Description	Sprockets	Available Bearings
1912	1.9" diameter x 12 ga wall, 7/16" hex axles Spring retained	40A18	# MFC-1710-7H, 252 lbs. / bearing # FR-1707-7HDS. 428 lbs. / bearing
1909	1.9" diameter x 9 ga wall, 7/16" hex axles Spring retained	40A18	# MFC-1710-7H, 252 lbs. / bearing # FR-1707-7HDS. 428 lbs. / bearing
2511	2-1/2" diameter x 11 ga wall, 11/16" hex axles Spring retained	40A20, 21 50A18 60A15,16	# MFC-2280-11H, 425 lbs. / bearing # FR-2265-11HDS. 1,050 lbs. / bearing # 33W9, ABEC-1, 1,740 lbs. / bearing
2907	2-9/16" diameter x 7 ga wall, 11/16" hex axles Spring retained	40A21 50A18 60A15,16	# MFC-2280-11H, 425 lbs. / bearing # FR-2265-11HDS. 1,050 lbs. / bearing # 0973600, 1,605 lbs. / bearing # 33W9, ABEC-1, 1,740 lbs. / bearing
3509	3-1/2" diameter x 9 ga wall, 11/16" hex axles Spring retained	60A20	# 2512/3500, 290 lbs. / bearing
3530	3-1/2" diameter x .300 1-1/16" hex axles Pin retained	60A20 80A16	# 1083-2A, 1,250 lbs. / bearing # HDCB0611, 4,300 lbs. / bearing
42543	4-1/4" diameter x 7/16" wall, 1-1/4" hex axles Pin retained	100A15	# B1101-2, 2,250 lbs. / bearing
50750	5" diameter x 3/4" wall, 1-1/2" hex axle, Pin retained	100A17 120A15	# B1120-2, 3,750 lbs. / bearing

