

ALBA'S VALUE CONVEYOR PROGRAM

Giving you Quality **PRE-ENGINEERED** CDLR Conveyor
More **AFFORDABLE** and **FASTER** Delivery!

Value CDLR Standard Features:


- Welded, structural steel frame construction.
- Conveyors for handling up to 4,000 lbs.
- 230-460/3/60 Electrical connection.
- Under slung drive mounting for 18" top of roller.
- 5' & 10' sections nominal.
- 2 heavy duty SSP3 channel supports +/- 1-3/4" adjustment provided per conveyor @ 18" TOR.
- 30, 45 or 60 FPM fixed conveyor speed
- Continuously welded sprockets.
- Rollers set high on non-driven side.
- #10 ga. Scalloped type roller chain guard and #16 ga. drive chain guard.
- Painted Alba blue with safety yellow guards.
- Conveyors shipped fully assembled to minimize installation time.
- Conveyors fully tested prior to shipment.
- Conveyors are backed by Alba's standard 2-year warranty.

Program Guidelines:

- Contact your National Account Manager for more information on this program.
- No approval drawings are provided. Drawings of pre-engineered equipment can be found on the website and catalog.
- No special widths, lengths or heights can be ordered under this program.
- No options are available under this program.
- No special colors.
- One week ship on most orders (subject to quantity).



Order Number Example:

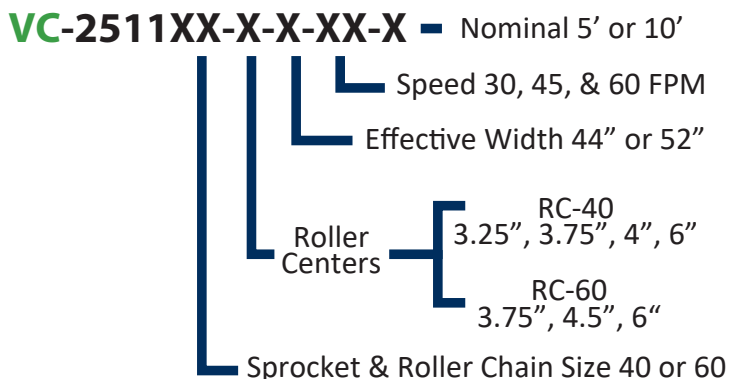

866.252.2634
www.albamfg.com
rocksolidconveyor@albamfg.com

Value Conveyor CDLR (Chain Driven Live Roller Conveyor)

PRODUCT SPECIFICATIONS

Alba Model 251140 CDLR Conveyor (850 lb bed roller & 2,100 lb drive roller)			
Order Number	Effective Width	Nominal Length	Conveyor available with 3.25", 3.75", 4" or 6" roller centers
Model 251140	44"	5'	<p>CALL 866.252.2634 FOR CURRENT PRICING AND LEAD TIME</p>
Roller Centers 3.25", 3.75", 4" & 6"		10'	
Speed 30, 45 or 60 FPM			
Length 5'-0" or 10'-0" long			
Model 251140	52"	5'	
Roller Centers 3.25", 3.75", 4" & 6"		10'	
Speed 30, 45 or 60 FPM			
Length 5'-0" or 10'-0" long			
<p>Order Number Example (251140-3.25-44-30-5) 2,500 lb max load 2 1/2" dia. x 11 ga. rollers, 11/16" hex axles spring retained rollers, 1/2 hp Baldor motor with Dodge Tigear-2 reducer, 230-460/3/60, Rollers are set high on non-driven side, two (2) supports, 18" top of roller, Alba blue with safety yellow guards.</p>			
Alba Model 251160 CDLR Conveyor (850 lb bed roller & 2,100 lb drive roller)			
Order Number	Effective Width	Nominal Length	Conveyor available with 3.75", 4.5" or 6" roller centers
Model 251160	44"	5'	<p>CALL 866.252.2634 FOR CURRENT PRICING AND LEAD TIME</p>
Roller Centers 3.75", 4.5" & 6"		10'	
Speed 30, 45 or 60 FPM			
Length 5'-0" or 10'-0" long			
Model 251160	52"	5'	
Roller Centers 3.75", 4.5" & 6"		10'	
Speed 30, 45 or 60 FPM			
Length 5'-0" or 10'-0" long			
<p>Order Number Example (251160-3.75-44-30-5) 4,000 lb max load 2 1/2" dia. x 11 ga. rollers, 11/16" hex axles spring retained rollers, 3/4 hp Baldor motor with Dodge Tigear-2 reducer, 230-460/3/60, Rollers are set high on non-driven side, two (2) supports, 18" top of roller, Alba blue with safety yellow guards.</p>			

*Alba reserves the right to make changes to the program at any time. Copyright ©2022 by Alba Manufacturing



Alba Manufacturing, Inc.
8950 Seward Road, Fairfield, Ohio 45011

866.252.2634
rocksolidconveyor@albamfg.com
www.albamfg.com
VC-CDLR011172024