



CDLR CONVEYOR ROLLERS


Roller Diameters 1.9" ... 2-1/2" ... 2-9/16" ... 3-1/2" ... 4-1/4" ... 5"

When Ordering Please Specify the Following:

- Part Number
- Sprocket Size & Number of Teeth
- Between Frame Dimensions
- Bearing Type

Options:

- Zinc Plated Rollers & Axles
- Polyurethane Roller Covering
- Custom Configurations
- UHMW Slip Sleeves
- Galvanized Tubing

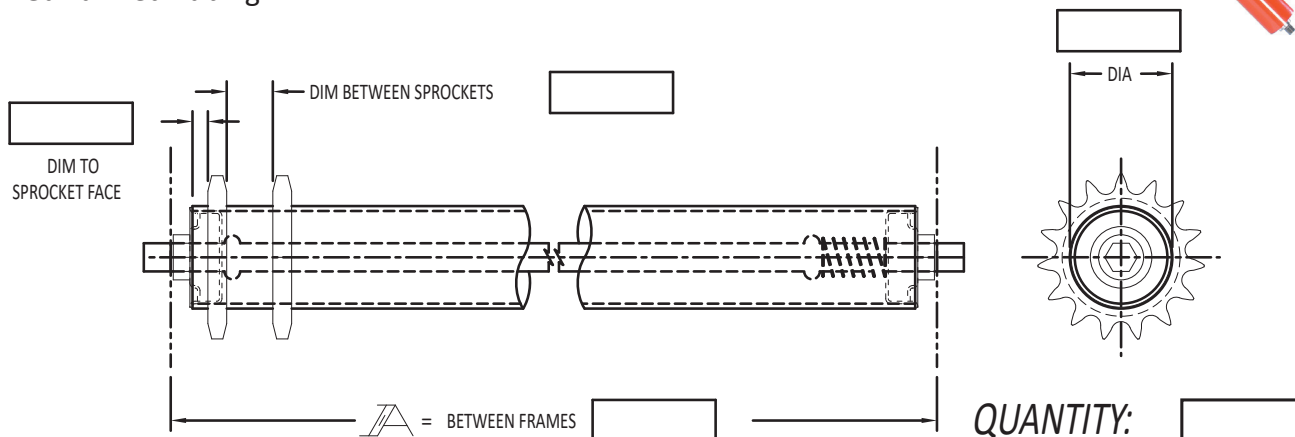

Example: 2511-60A16-24-MFC-2280-11H



866.252.2634
www.albamfg.com
rocksolidconveyor@albamfg.com

Part Number	Description	Sprockets	Available Bearings
1912	1.9" dia. x 12 ga. wall, 7/16" hex axles Spring retained	40A18	# MFC-1710-7H, 252 lb/bearing # PFR-1707-7HDS, ABEC-1, 640 lb/bearing
1909	1.9" dia. x 9 ga. wall, 7/16" hex axles Spring retained	40A18	# MFC-1710-7H, 252 lb/bearing # PFR-1707-7HDS, ABEC-1, 640 lb/bearing
2511	2-1/2" dia. x 11 ga. wall, 11/16" hex axles Spring retained	40A20, 21 50A18 60A15,16	# MFC-2280-11H, 425 lb/bearing # PFR-2265-11HDS, ABEC-1, 1,490 lb/bearing
2907	2-9/16" dia. x 7 ga. wall, 11/16" hex axles Spring retained	40A21 50A18 60A15,16	# MFC-2280-11H, 425 lb/bearing # PFR-2265-11HDS, ABEC-1, 1,490 lb/bearing # 0973600, 1,605 lb/bearing
3509	3-1/2" dia. x 9 ga. wall, 11/16" hex axles Spring retained	60A20	# 2512/3500, 290 lb/bearing
3530	3-1/2" dia. x .300 wall, 1-1/16" hex axles Pin retained	60A20 80A16	# 1083-2A, 1,250 lb/bearing # HDCB0611, 4,300 lb/bearing
42543	4-1/4" dia. x 7/16" wall, 1-1/4" hex axles Pin retained	100A15	# B1101-2, 2,250 lb/bearing
50750	5" dia. x 3/4" wall, 1-1/2" hex axle, Pin retained	100A17 120A15	# B1120-2, 3,750 lb/bearing

